

GENERAL DESCRIPTION

Meter Bridge Cabinet

The Meter Bridge Cabinet 1075-280 accepts the analog and digital Instruments of the RTW series 1000 with a component height of 140 mm (like the MasterMonitor 1069A or PeakMonitors 1088, 1089 or 1090).

TECHNICAL DATA METER BRIDGE CABINET 1075-280

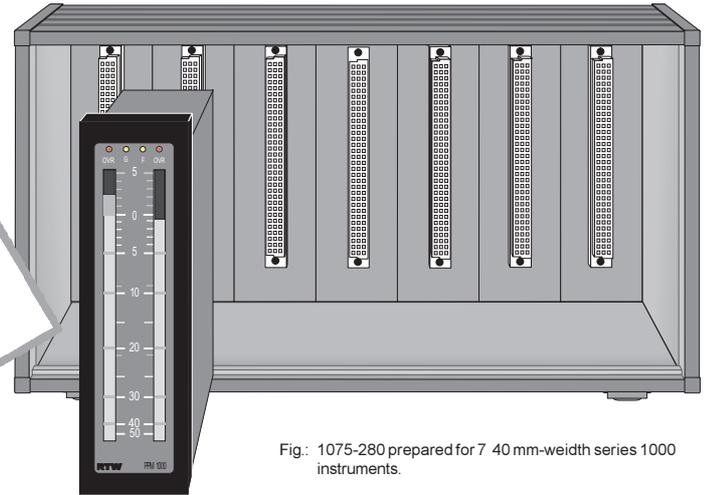


Fig.: 1075-280 prepared for 7 40 mm-width series 1000 instruments.

Configurations for 835 mm-width series 1000 instruments or combinations with PeakMonitor 1088, 1089, 1090 or MasterMonitor 1096A are available.

TECHNICAL SPECIFICATIONS

General

Weight: 1800 g (without instrument)
Dimensions: 295 x 155 x 130 mm
Connectors: XLR, quantity depending on configuration
2x 15-pin Sub-D-f for remote control
1x DC power supply socket



Items delivered

Cabinet 1075-280:

- mounting brackets
- DC power supply counter plug
- operating manual

Order number: 1075-280

DIMENSIONS

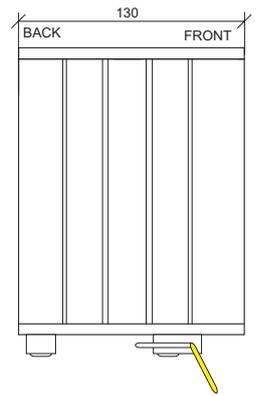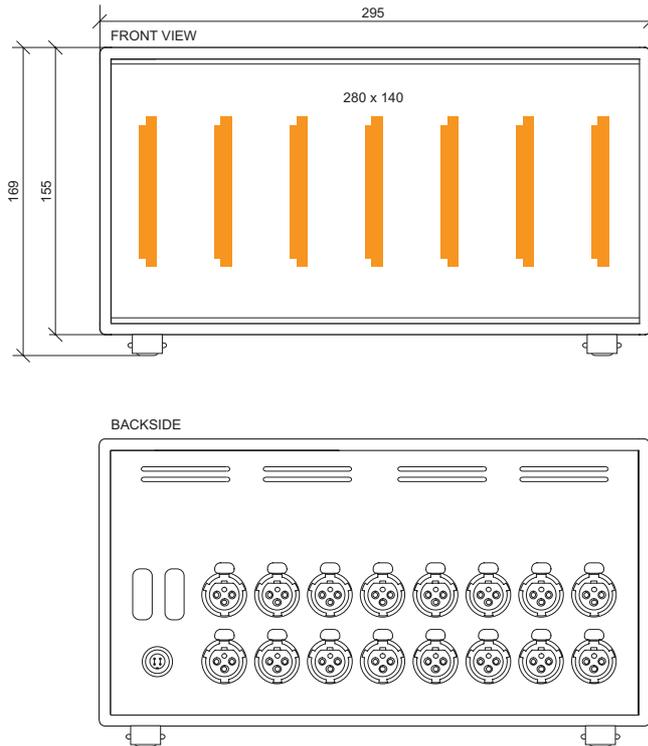

CONNECTION

XLR-f/analog Signal-Connections RTW 1075-280

Pin assignment:

- 1 - shield (case)
- 2 - signal hot
- 3 - signal cold

XLR-f/digital Signal-Connections RTW 1075-280

Pin assignment:

- 1 - shield (case)
- 2 - signal hot
- 3 - signal cold

XLR-m/digital Signal-connections RTW 1075-280

Pin assignment:

- 1 - shield (case)
- 2 - signal hot
- 3 - signal cold

Power supply

Pin assignment:



Sub-D 15-pin/Remote RTW 1075-280

Pin assignment:

Remote 1

- 1 - n.c.
- 2 - +24 V
- 3 - case
- 4 - 0V/common
- 5 - MEMRES
- 6 - MEM
- 7 - SCALE
- 8 - n.c.
- 9 - n.c.
- 10 - +24 V
- 11 - case
- 12 - 0V/common
- 13 - GAIN
- 14 - FAST
- 15 - PEAK HOLD

Remote 2

- 1 - n.c.
- 2 - n.c.
- 3 - n.c.
- 4 - n.c.
- 5 - n.c.
- 6 - n.c.
- 7 - n.c.
- 8 - n.c.
- 9 - n.c.
- 10 - n.c.
- 11 - n.c.
- 12 - n.c.
- 13 - n.c.
- 14 - n.c.
- 15 - n.c.

COLOURS

RAL 7011 Iron grey

ACCESSORIES



Mains adapter, Euro-plug

Order no.: 1177-R

Blank panel 35 x 140 mm

Clamping locks

Order no. 1097-35

Blank panel 40 x 140 mm

Clamping locks

Order no. 1097-40

Subject to technical changes without prior notice 04/2004